

High speed door

ASSA ABLOY HS9010P

ASSA ABLOY

ASSA ABLOY Entrance Systems

The global leader in
door opening solutions



Medium sized heavy duty high speed door for inside use

The main features of the ASSA ABLOY HS9010P are:

- Medium-sized, max. 5500 x 5500 mm
- Heavy-duty operations
- Inside usage
- Galvanised steel construction
- Unique direct door drive system
- Opening speed up to 2,4 m/s

The fast opening and closing speed improves your traffic flow, provides employee comfort, and saves energy.

The unique direct door drive system eliminates the need for weighted bottom bars or tension systems by actively driving the door curtain. An exceptional reliability and smooth operation is ensured by a frequency inverter driven motor for a soft start and stop.

The robust steel, IP54 classified, control box is easy to operate and to program. The mechanical main switch and emergency stop make it foolproof. The clear display gives a wide range of information like an easy to read cycle counter.

Break-away - and Automatic Repair system

ASSA ABLOY high speed doors are equipped with a break-away - and automatic repair system. The curtain reintroduces itself after a crash to reduce downtime and maintenance.

Completely safe

Features that make our doors completely safe.

- The soft bottom edge has no rigid parts, it moulds around any obstruction to prevent injury or damage.
- When an object hits the door, the fabric curtain absorbs the impact and releases itself from its side guides without causing damage or being damaged itself.

Windows and vision panels

To increase the admission of daylight and visibility, the door curtain can be equipped with windows or vision panels. Windows have fixed sizes in a grid. A vision panel uses the full width of the door curtain.

Insulated curtain


An insulated curtain with an increased static insulation of 2,41 W/(m²K) is available as an option.

Technical Data


| | |
|--------------------------------|--|
| Min size (W x H) | 1000 x 2000 mm |
| Max size (W x H) ¹⁾ | 5500 x 5500 mm |
| Operating speed | opening: up to 2,4 m/s ² closing: 1,2 m/s |
| Wind load resistance, EN 12424 | class 1 (300 N/m ²) |
| Water penetration, EN 12425 | class 1 (30 N/m ²) |
| Air permeability, EN 12426 | class 1 (24 m ³ /m ² /h at 50 Pa) |
| Thermal transmittance | 6,02 W/(m ² K) |
| Lifetime expectations | 1.000.000 cycles |

1) Other sizes available on request 2) Depending on door size


Dimensional specifications

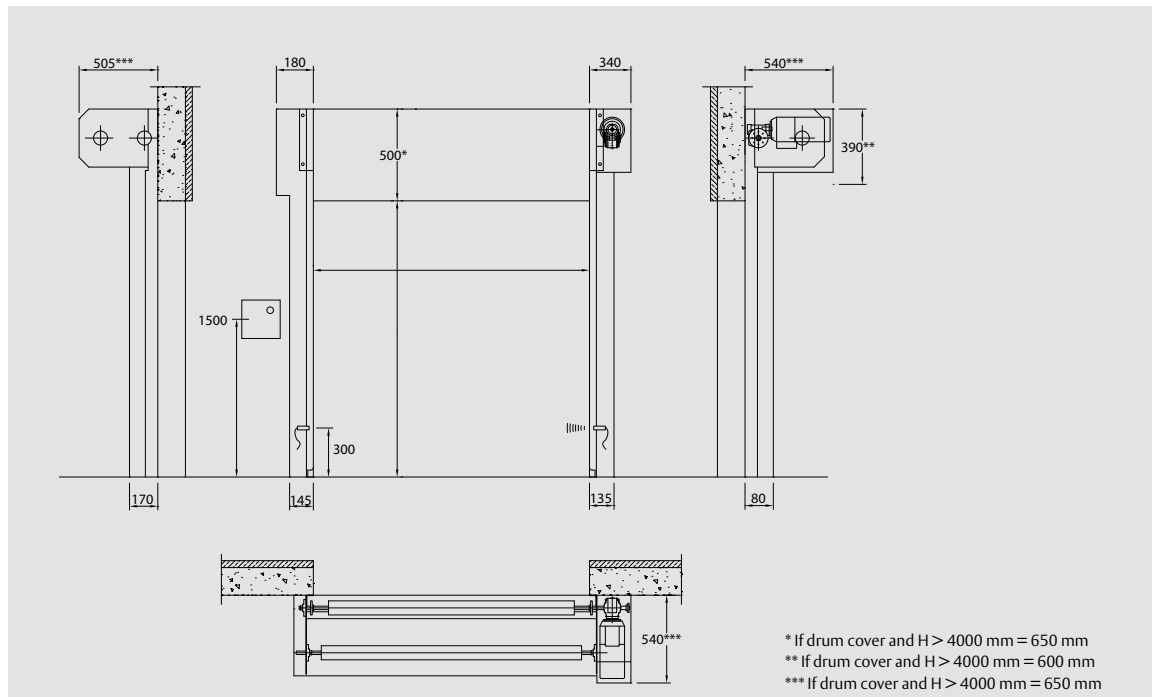



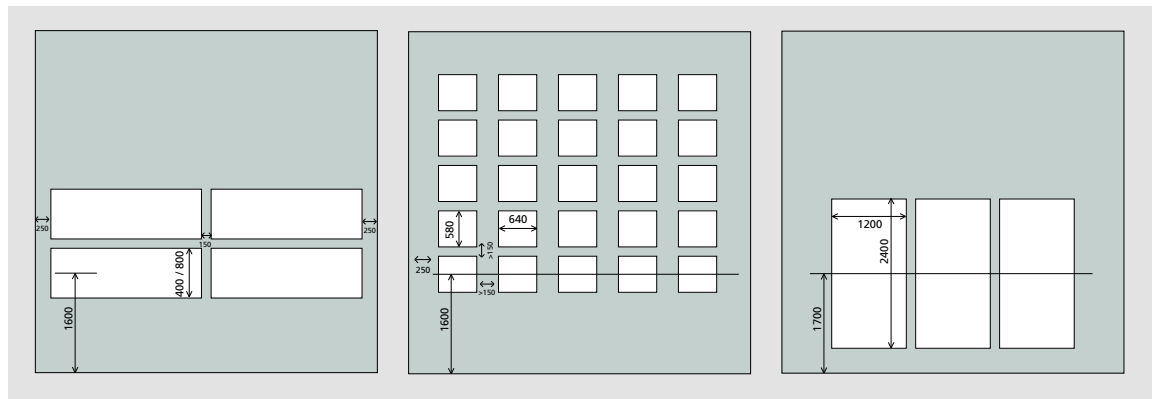




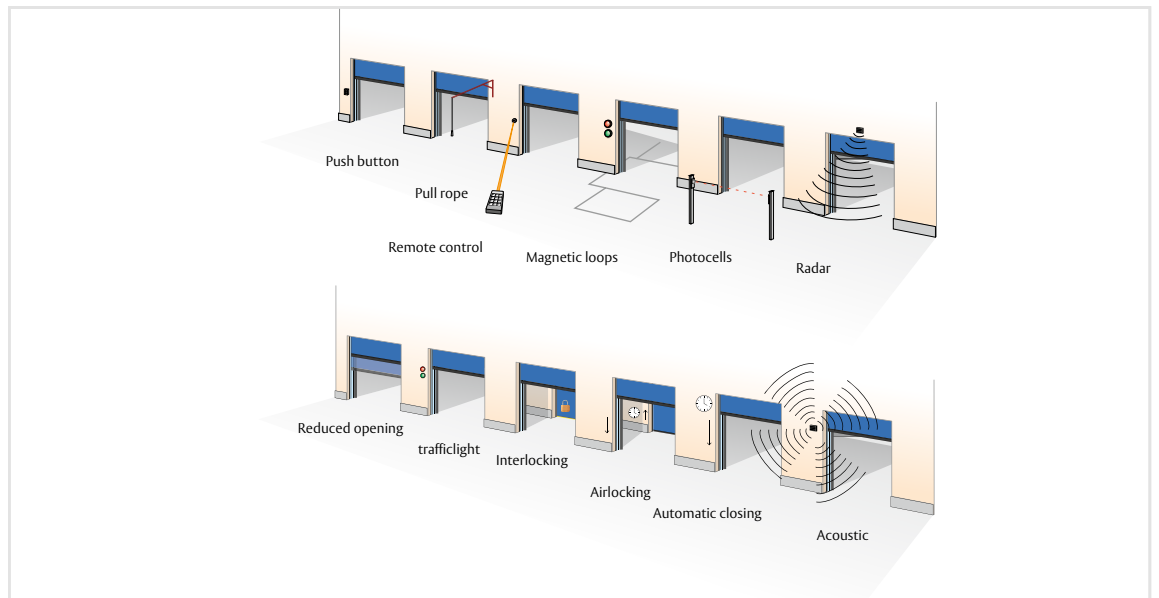

Windows and Vision panels



Options access and automation



Standard available colours

| | | | | |
|---|--|--|---|---|
|  Signal yellow RAL 1003 |  Flame red RAL 3000 |  Moss green RAL 6005 |  Jet black RAL 9005 |  On request Other colours |
|  Pure orange RAL 2004 |  Ultramarine blue RAL 5002 |  Light grey RAL 7035 |  White RAL 9010 | |